


# WMHC-445 Installation Guidelines

## WMHC-445 ADA Compliant Lever Handles

1. Water Supply Line should be roughed in at approximately 42" from flooring surface with 6 to 8 inch spread
2. Attach Supply Arms and Flanges to ½" threaded Water Supply Pipe.
3. Place one Mounting Bracket over Riser and tighten set screw at desired position.
4. Install Riser to ½" valve on Faucet using Teflon Tape
5. Attach Supply Arms to Body with Washers inside Union Nut.
6. Attach unit to wall by marking position using wall brackets. Stainless Steel Screws are recommended.
7. Attach Shower Head to Riser. Teflon Tape is not needed
8. Attach Stainless Steel Hose & Hand Sprayer to end of pipe using Teflon Tape.

- 304 Quality Stainless Steel
- Hot & Cold Water
- ADA Compliant Lever Handles
- Brass w/ Polished Chrome Finish Faucet
- Stainless Steel Riser
- Commercial Grade Accessories
- Adjustable Stainless Steel Mounting Bracket(s) w/ Set Screws
- Water Supply Line Placement at 42" from Flooring Surface
- Adjustable 4"-8 3/8" Center
- ½" NPT
- One year warranty on accessories
- Lifetime warranty on stainless steel parts

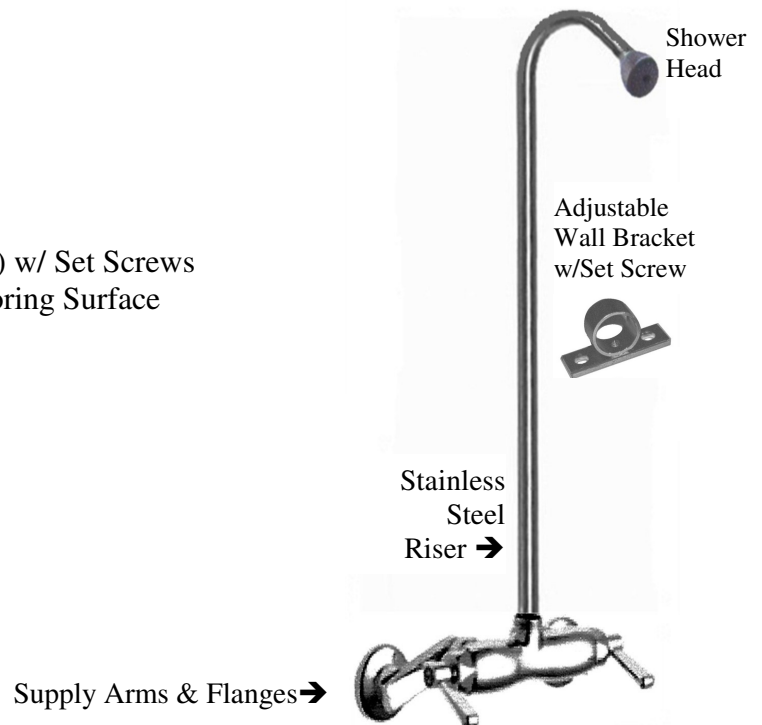

This unit is available with Hand Spray & Hose, Foot Shower, Hose Bibb, or 6" Shower Head. To add these optional accessories check out the WMHC-445-Deluxe.